

# Product Evaluation Report GOLDIN METALS, INC.

# 1" Snap Lock 24 Ga. Roof Panel over Plywood

# Florida Product Approval # 28362.4 R2

Florida Building Code 2020 Per Rule 61G20-3 Method: 1 –D

Category: Roofing
Subcategory: Metal Roofing
Compliance Method: 61G20-3.005(1)(d)
HVHZ

### **Product Manufacturer:**

Goldin Metals, Inc. 12440 Seaway Road Gulfport, MS. 39503

## **Engineer Evaluator:**


Johnathan Green, P.E. #88223 Florida Evaluation ANE ID: 12901

## **Validator**:

Brian Jaks P.E. #70159

#### **Contents:**

Evaluation Report Pages 1 – 4



THIS ITEM HAS BEEN
DIGITALLY SIGNED AND
SEALED BY JOHNATHAN
GREEN ON THE DATE
ADJACENT TO THE SEAL.

PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

FL# 28362.4 R2



**Compliance Statement:** 

The product as described in this report has demonstrated compliance with the

Florida Building Code 2020, Sections 1504.3.2, 1518.9, 1523.6.5.2.4.

**Product Description:** 

1" Snap Lock Standing Seam Roof Panel, 24 Ga. Steel, 17" Wide, Roof Panel restrained with steel slider clips into APA Plywood decking. Non-structural

Application.

Panel Material/Standards:

Material: 24 Ga. Steel, ASTM A792 unpainted or painted with Valspar Fluropon or ASTM A653 G90 conforming to Florida Building Code 2020, Section 1507.4.3.

Yield Strength: Min. 50.0 ksi

Corrosion Resistance: Panel Material shall comply with Florida Building Code

2020, Section 1507.4.3

Panel Dimension(s):

Thickness: 0.024"

Width: 17" max coverage

Rib Height: 1"

Panel Seam: Snap Lock

**Roof Panel Clips:** 

Product Name: 1000SNS

Type: Fixed, 18 Ga., 3 ½" long

Corrosion Resistance: Per Florida Building Code 2020 Section 1506.7

**Roof Clip Fastener:** 

(2) #12-11 x 1" Pancake Type A

1/4" minimum penetration through plywood

Corrosion Resistance: Per Florida Building Code 2020, Section 1517.6.

**Substrate Description:** 

1) For HVHZ construction, use 19/32" or greater APA Rated plywood or wood plank. In reroofing applications where the deck is less than 19/32" thick (min. 15/32") the attachment of the decking in no case shall be less than 8D annual ring shank nails at 6" O.C. Design of plywood and plywood supports are outside the scope of this evaluation. Substrate must be designed in accordance w/ Florida Building Code 2020.

2) For Non-HVHZ applications, use min. 15/32" thick, APA Rated plywood over supports at maximum 24" O.C. Design of plywood and plywood supports are outside the scope of this evaluation. Substrate must be designed in accordance w/ Florida Building Code 2020.



THIS ITEM HAS BEEN
DIGITALLY SIGNED AND
SEALED BY JOHNATHAN
GREEN ON THE DATE
ADJACENT TO THE SEAL.

PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

FL# 28362.4 R2



#### Allowable Design Uplift Pressures:

Table "A"

Maximum Total Uplift Design Pressure:	67.3 psf	131.0 psf
Clip Spacing:	24" O.C.	6" O.C.
# Fasteners per Clip:	2	2

<sup>\*</sup>Design Pressure includes a Safety Factor = 2.0.

**Code Compliance:** The product described herein has demonstrated compliance with

The Florida Building Code 2020, Section 1504.3.2, 1518.9, 1523.6.5.2.4.

**Evaluation Report Scope:** The product evaluation is limited to compliance with the structural wind load

requirements of the Florida Building Code 2020, as relates to Rule 61G20-3.

Performance Standards: The product described herein has demonstrated compliance with:

TAS 125-03

UL 580-06 - Test for Uplift Resistance of Roof Assemblies

- UL 1897-2012 Uplift Test for Roof Covering Systems
- TAS 100-95 Test Procedure for Wind and Wind Driven Rain Resistance of Discontinuous Roof Systems
- TAS 110-00 Accel. Weathering ASTM G 155 / Salt Spray ASTM B 117

**Reference Data:** 

- 1. TAS 125-03: UL 580-94 / 1897-98 Uplift Test Force Engineering & Testing, Inc. (FBC Organization # TST-5328) Report No. 72-0210T-07\*, Dated 07/12/2007
- 2. TAS 100-95

Farabaugh Engineering & Testing, Inc. (FBC Organization # TST-1654) Report No. T233-07\*, Dated 07/14/2007

- 3. TAS 110-00: Valspar Fluropon coated metal panel testing
  - A) ASTM G 155 B) ASTM B 117
- 4. Certificate of Independence

By Johnathan Green, P.E. (No. 88223) @ Force Engineering & Testing (FBC Organization # ANE ID: 12901)

**Test Standard Equivalency:** 

The UL 580-94 test standard is equivalent to the UL 580-06 test standard. The UL 1897-98 test standard is equivalent to the UL 1897-2012 test standard.



THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY JOHNATHAN GREEN ON THE DATE ADJACENT TO THE SEAL.

PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY **ELECTRONIC COPIES.** 

FL# 28362.4 R2



**Quality Assurance Entity:** The manufacturer has established compliance of roof panel products in

accordance with the Florida Building Code and Rule 61G20-3.005 (3) for manufacturing under a quality assurance program audited by an approved

quality assurance entity.

Minimum Slope Range: 2:12. Minimum Slope shall comply with Florida Building Code 2020, including

Sections 1515.2.2 and in accordance with Manufacturers recommendations.

Installation: Install per manufacturer's recommended details and RAS 133.

**Underlayment:** Per Manufacturer's installation guidelines per Florida Building Code 2020,

Section 1518.2, 1518.3, 1518.4.

Fire Barrier: Any approved fire barrier having a current NOA. Refer to a current fire directory


listing for fire ratings of this roofing system assembly as well as the location of the fire barrier within the assembly. Fire classification is not part of this

acceptance.

**Shear Diaphragm:** Shear diaphragm values are outside the scope of this report.

**Design Procedure**: Based on the dimensions of the structure, appropriate wind loads are


determined using Chapter 16 of the Florida Building Code 2020 for roof cladding wind loads. These component wind loads for roof cladding are compared to the allowable pressure listed above. The design professional shall select the appropriate erection details to reference in his drawings for proper fastener attachment to his structure and analyze the panel fasteners for pullout and pullover. Support framing must be in compliance with Florida Building Code 2020 Chapter 22 for steel, Chapter 23 for wood and Chapter 16 for structural loading.




THIS ITEM HAS BEEN
DIGITALLY SIGNED AND
SEALED BY JOHNATHAN
GREEN ON THE DATE
ADJACENT TO THE SEAL.

<sup>\*</sup>The Test Reports are owned by Metalforming, Inc. Metalforming, Inc. gives the above manufacturer permission to use these test reports.



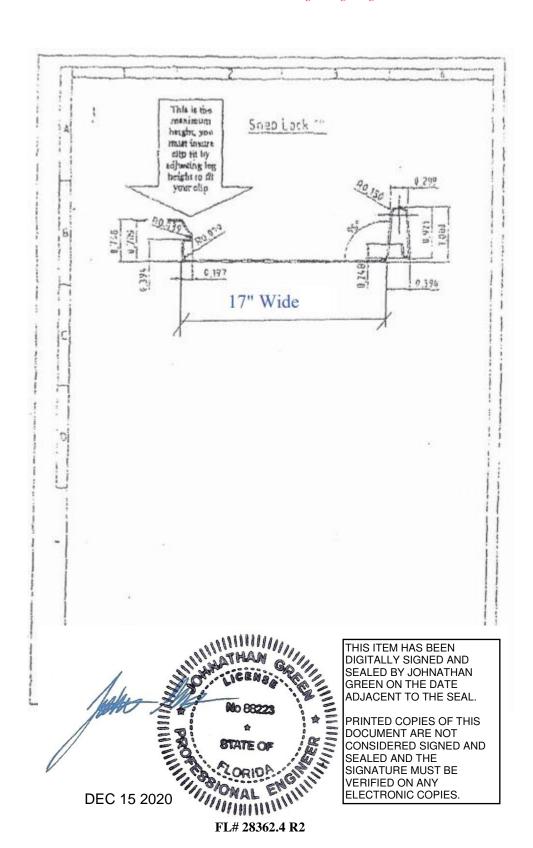




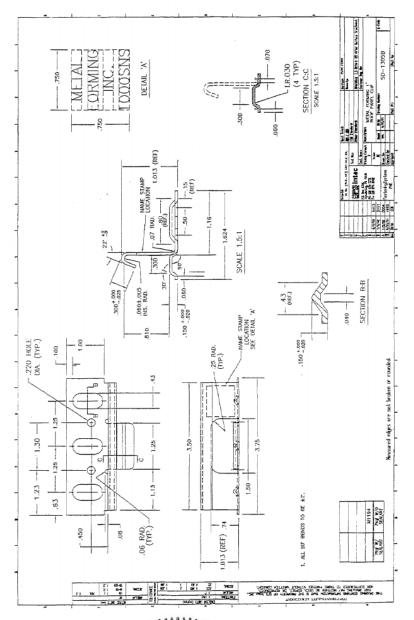




THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY JOHNATHAN GREEN ON THE DATE ADJACENT TO THE SEAL.




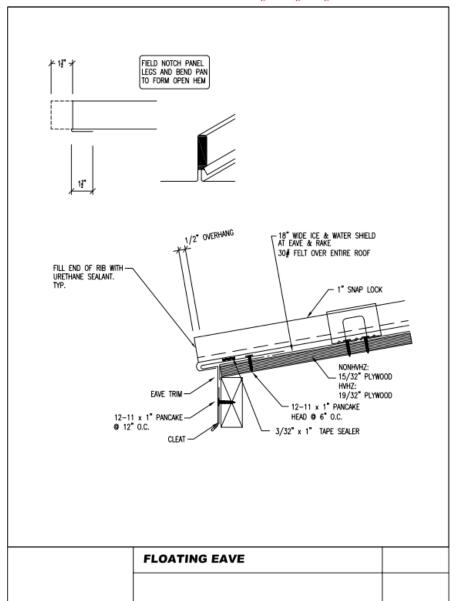




THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY JOHNATHAN GREEN ON THE DATE ADJACENT TO THE SEAL.




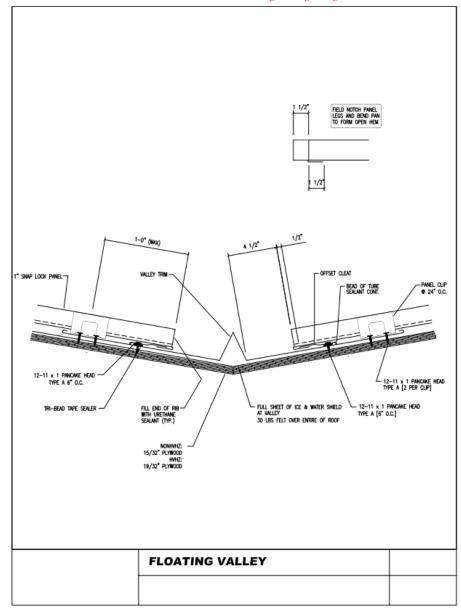




THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY JOHNATHAN GREEN ON THE DATE ADJACENT TO THE SEAL.




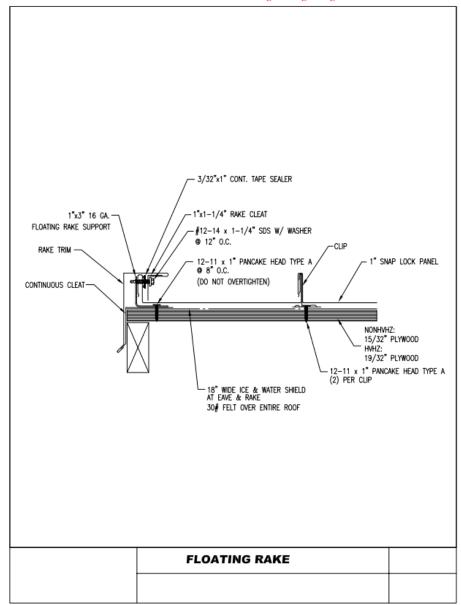




THIS ITEM HAS BEEN
DIGITALLY SIGNED AND
SEALED BY JOHNATHAN
GREEN ON THE DATE
ADJACENT TO THE SEAL.




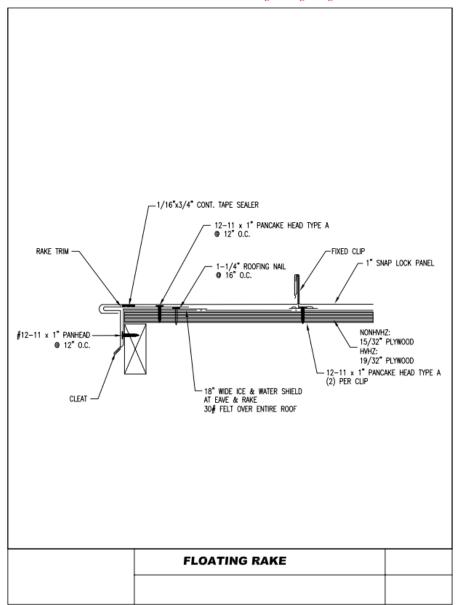




THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY JOHNATHAN GREEN ON THE DATE ADJACENT TO THE SEAL.




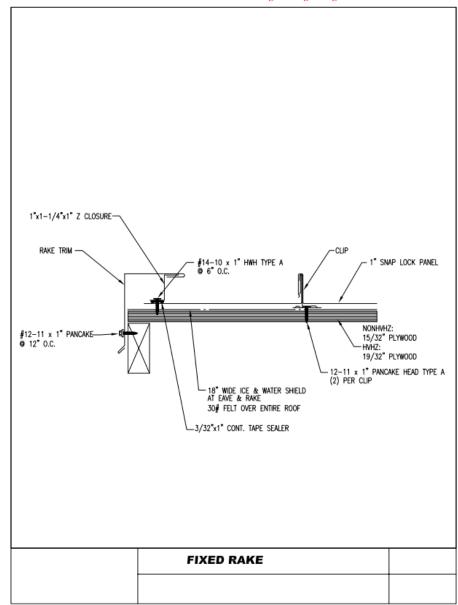




THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY JOHNATHAN GREEN ON THE DATE ADJACENT TO THE SEAL.



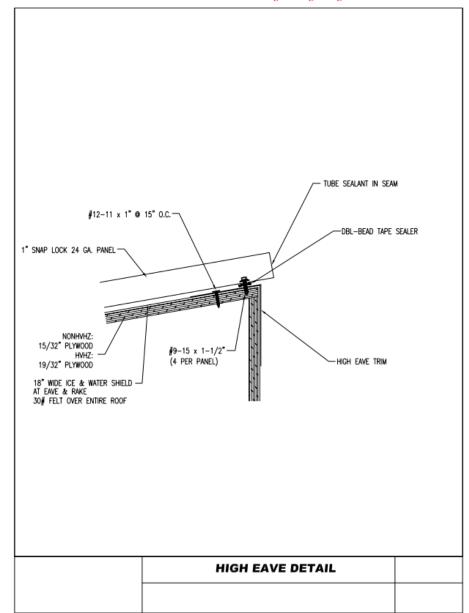



THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY JOHNATHAN GREEN ON THE DATE ADJACENT TO THE SEAL.