
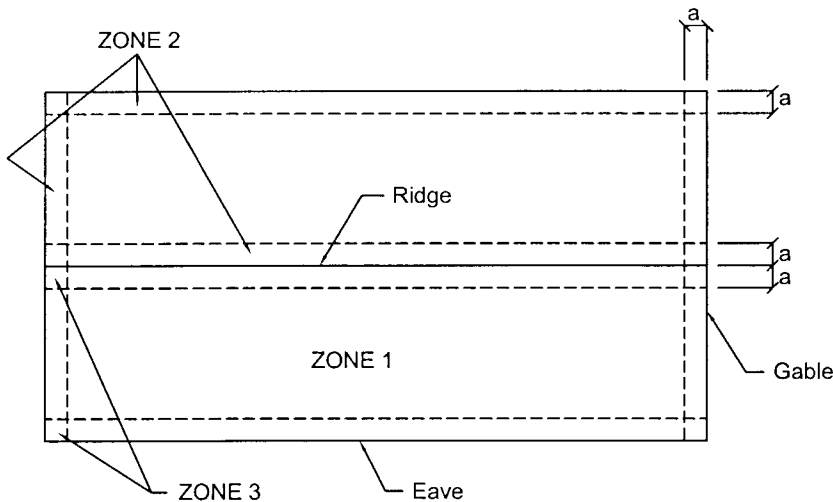
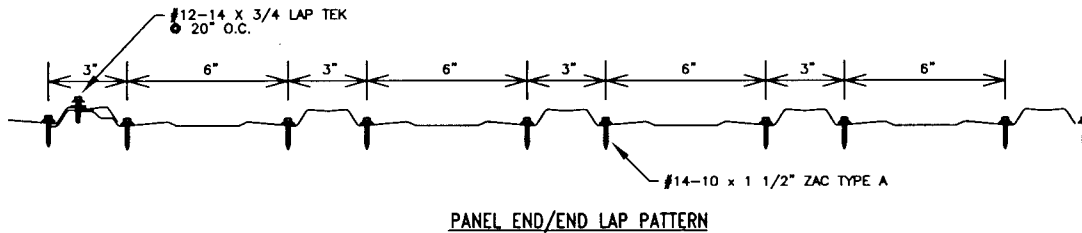


# GOLDIN PANEL 26 GA. LOAD TABLE OVER PLYWOOD


# GOLDIN METALS

Buildings having a Roof Mean Height  $\leq 20'-0"$ ; Roof Slope:  $3"/12"$  -  $12"/12"$   
Wind Speeds 110-140 mph, Exp C, I = 1.0, based on FLORIDA BUILDING CODE 2004

GOLDIN PANEL 26 GA. FASTENER SPACING						
ZONE	FASTENER	SUBSTRATE	WIND SPEED ZONE			
			110	120	130	140
			ON CENTER SPACING	ON CENTER SPACING	ON CENTER SPACING	ON CENTER SPACING
ZONE 1	#14-10x1-1/2"	15/32" CDX/ 19/32" CDX	24"	24"	24"	24"
ZONE 2	#14-10x1-1/2"	15/32" CDX/ 19/32" CDX	24"	24"	24"	12"
ZONE 3	#14-10x1-1/2"	15/32" CDX/ 19/32" CDX	24"	24"	24"	12"

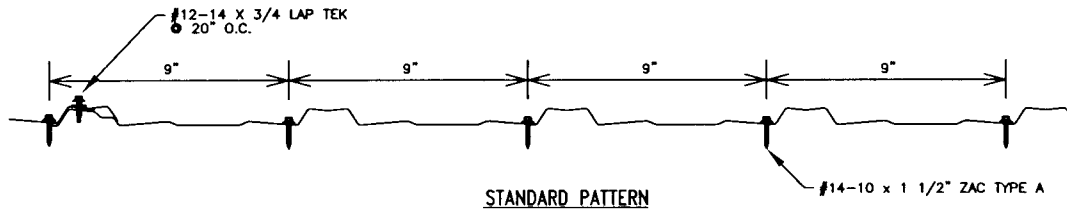

Note: Dimension (a) is defined as 10% of the minimum width of the building or 40% of the mean height of the roof, whichever is smaller, however, (a) cannot be less than either 4% of the minimum width of the building or 3 feet.

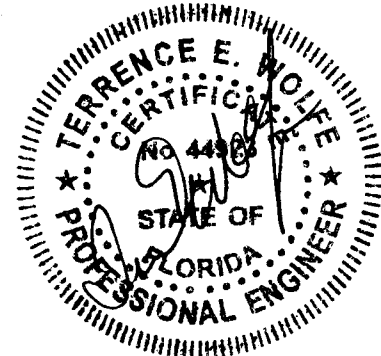

JUL 05 2005